



 **CALVEK**


SOMOS TU PUNTO DE ENTRADA A LA INDUSTRIA 4.0



WLB32

Barra de Luz LED Industrial

- **Alta brillantez** con luz uniforme **sin reflejos**.
- **Fácil instalación**.
- Ideal para **estaciones de trabajo**, iluminación en maquinas, gabinetes de control y líneas de manufactura.
- **Ahorra energía** y ayuda a **reducir costos**.
- Vida útil **50,000 horas**
- Interruptor Alto/Bajo/Apagado.
- Cuenta con una **variedad de soportes**.

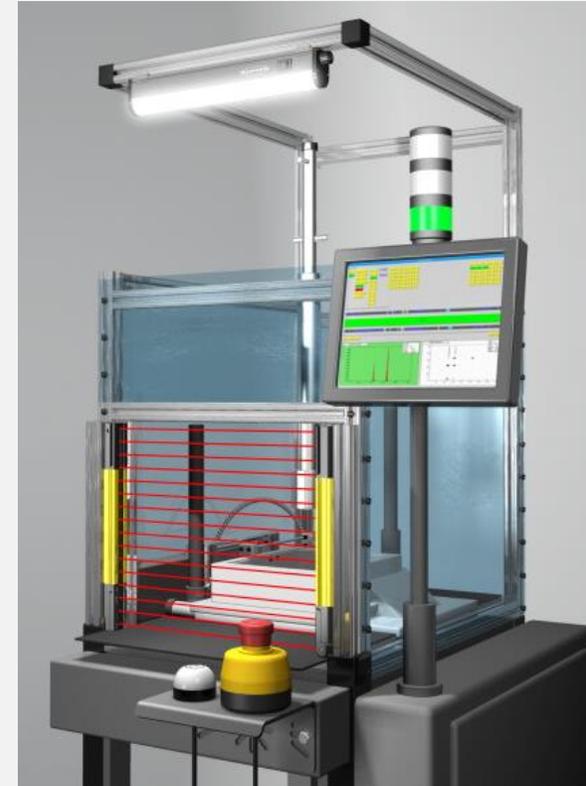

Especificaciones

Carcasa de Aluminio
anonizado

Interruptor de
Alto, Bajo,
Apagado

Polímero
Difusor

Conexiones Industriales para
conectar en cascada hasta 10
luminarias

Cables industriales
CA o CC



Cascadable



AC or DC



HI/Low/Off Switch



Motion Detection



Eye Shield

Características


Voltaje de operación	12 a 30 V CC (modelos CC) 90 a 264 V CA (modelos CA)
Vida útil del LED	50,000 horas
Temperatura de color	Luz de Día Blanca — 5000 K
Interruptor	Alto = 100% intensidad Bajo = 50% intensidad
Índice de	IP50 — Sólo lugares




¡Configura el modelo más adecuado a tu aplicación!

WLB32

Example Model Number: WLB32C285PBQ

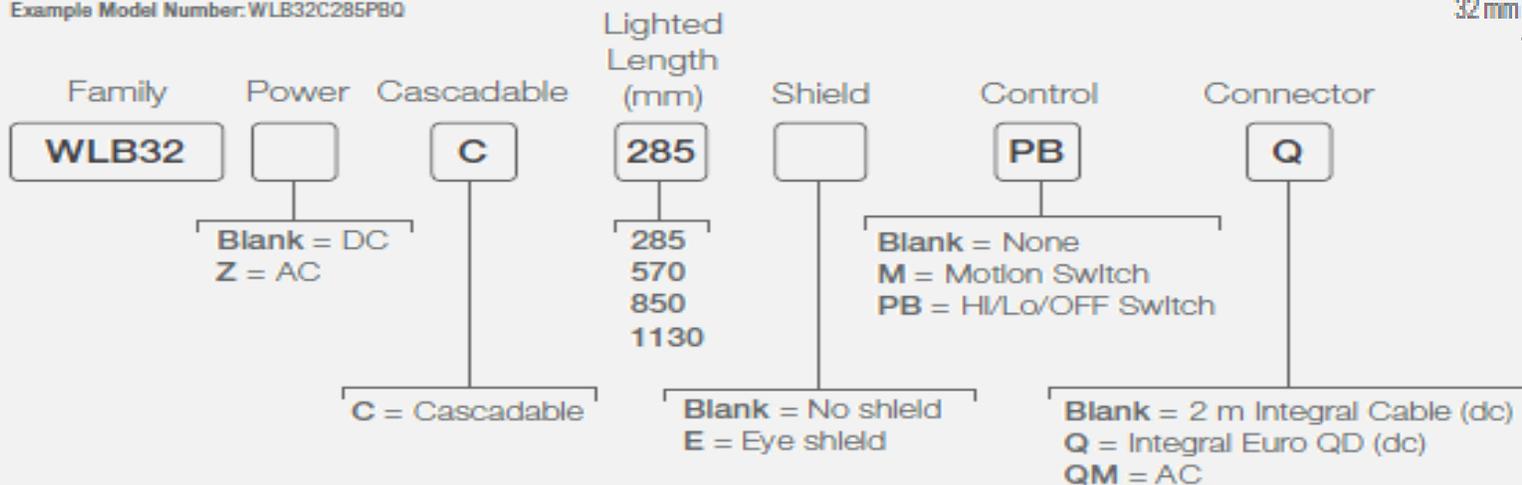

 Connection options: A model with a QD requires a mating cordset

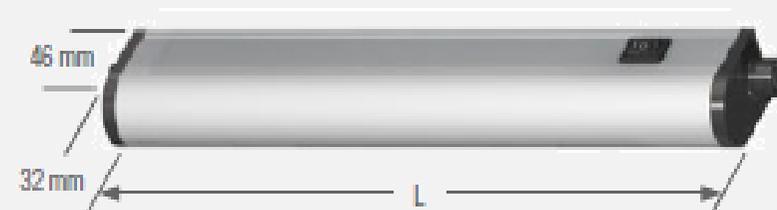

- Plug Type**
- ** Only needed for AC models
- B = North & Central America, Japan, Taiwan
 - D = India, Sri Lanka, Nepal, Namibia
 - EF = France, Belgium, Slovakia, Tunisia, Germany, Austria, Netherlands, Spain, S. Korea, Turkey, Poland
 - G = UK, Ireland, Cyprus, Malta, Malaysia, Singapore, Hong Kong, Vietnam
 - I = Australia, New Zealand, Papua New Guinea, Argentina, China
 - N = Brazil, South Africa
 - C = AC connector with flying leads
 - Blank = AC (no power cord)


Por último... Selecciona los accesorios.



Brackets de montajes



LMBWLB32 LMBWLB32-180S LMBWLB32MAG

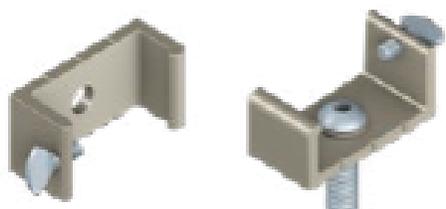

LMBWLB32U LMBWLB32UT

Cables de conexión

Cordsets for DC Models



Euro-Style
Straight connector models listed; for right-angle, add **RA** to the end of the model number (example, MQDC-406RA)

4-Pin

MQDC-406
2 m (6.5')
MQDC-415
5 m (15')
MQDC-430
9 m (30')



4-Pin
Straight/Straight

**Euro-Style QD
Double-Ended**
For cascading

MQDEC-401SS
0.31 m (1')
MQDEC-403SS
0.91 m (3')
MQDEC-406SS
2 m (6.5')
MQDEC-412SS
3 m (12')
MQDEC-420SS
6 m (20')
MQDEC-430SS
9 m (30')
MQDEC-450SS
15 m (50')

4-Pin
Straight/Right-Angle

-
MQDEC-403RS
0.91 m (3')
MQDEC-406RS
2 m (6.5')
MQDEC-412RS
3 m (12')
MQDEC-420RS
6 m (20')
MQDEC-430RS
9 m (30')
MQDEC-450RS
15 m (50')

Cordsets for AC Models



Double-Ended
NEMA 5-15 grounded
(IEC Type B)

LQMAC-306B
2 m (6.5')



Double-Ended
For Cascading

4-Pin
Straight/Straight

LQMAEC-3005SS
0.15 m (0.5')
LQMAEC-301SS
0.31 m (1')
LQMAEC-303SS
0.91 m (3')
LQMAEC-306SS
2 m (6.5')
LQMAEC-312SS
3 m (12')
LQMAEC-320SS
6 m (20')
LQMAEC-330SS
9 m (30')